



140, Principale, Les Coteaux, Qc., Canada, J7X 1A1

CONGRATULATIONS! You have purchased a DRAGON ANTI INTRUSION portable system armed with Cayenne pepper spray. With this new technology, no more need to worry. We have invented this product to eliminate theft in houses, garages, warehouses, chalet, trailers and many other sites. We can customize our system to your needs. This system has a one-year warranty if used normally. You can recycle the Cayenne pepper canister every 2 years.

READ THE INSTRUCTIONS CAREFULLY BEFORE USING.

SYSTEM OPERATION: In the event of an intrusion inside the protected area, the portable DRAGON ANTI INTRUSION detects the intruder's motion in a range of 10 to 35 feet's; it then activates the alarm and the Cayenne pepper is vaporized into the ambient air for approximately 18 seconds (manufactory setting: 2 shots x 9 sec). 50 grams of Cayenne pepper will cover, in few seconds, 10,000ft. The system automatically re-arms itself after one minute of its alarm cycle. It is possible for you to set the pepper vaporisation for 2 or 3 shots. Also, this system can provide telephone warning and/or take a photo of the intruder.

CLEANING INSTRUCTIONS: After the intrusion, simply open the doors and windows for 20 to 45 minutes and the product will dissipate. Cleaning is simple, protect your hands, use a humid cloth and mop the Cayenne pepper traces. This product is natural and biodegradable made from Cayenne pepper and pepper oil synergistic mix. It is not toxic for humans or plants and does not cause damage to electronic equipments.

«VERY IMPORTANT WARNING»

THIS SYSTEM IS NOT A TOY, BELIEVE US! IT IS VERY INCOMMADATING FOR THE INTRUDER; it causes instant eye, skin, respiratory, irritations making the intruder leave immediately . This effect will remain for 45 to 60 minutes.

YOU HAVE TO USE THIS SYSTEM IN A REASONABLE AND SECURE WAY FOR YOUR IMMEDIATE SURROUNDING. IT CANNOT BE USED IN APPARTMENT BUILDINGS BECAUSE IT COULD SERIOUSLY TROUBLE THE RESIDENTS. YOU MUST PLACE OUR WARNING STICKERS IN A VISIBLE SPOT IN EACH ENTRANCE OF THE PROTECTED AERA ARMED WITH THE DRAGON ANTI INTRUSION.

IT IS STRICTLY FORBIDDEN TO USE THE DRAGON ANTI INTRUSION SYSTEM ARMED WITH CAYENNE PEPPER FOR CRIMINAL ACTIVITIES; CRIMINAL CHARGES CAN BE PRESSED ON THE INDIVIDUAL.

OPERATING INSTRUCTIONS ARM/DISARM/**PANIC MODE**



To put the system on, open the panel door with the round key. Pull the switch towards and close the panel. The LED will turn on red. Take the DRAGON red cap off.



Place the portable DRAGON ANTI INTRUSION system upright, the moving detector faced towards the protected area, from 3 to 7 feet's height, depending on the distance required; for example: 3 feet height = about 10 feet distance, 7 feet height = about 35 feet distance. Arm and leave the area immediately.



To arm the system: wait 120 seconds after the system is on. From a maximum distance of 75 feet's, press and immediately release the remote's left button (with the lock), the alarm will sound and the red LED will start blinking. At that time, you have 30 seconds to leave the area. After the first 10 seconds, the alarm will sound 4 times, at that point, there is 20 seconds remaining to leave the area (manufactory setting).


To disarm the system: From a maximum distance of 75 feet's, press and release the same button, the alarm will sound twice and the red LED will still be on but without blinking.

PANIC MODE: in the event of an emergency, from a maximum distance of 75 feet's, press and hold the same arm/disarm button for 3 seconds, the system will activate the alarm and the pepper spray.

REFILL INSTRUCTIONS




To refill, open the door panel with the round key, unscrew anti-clockwise, by the bottom of the canister, replace the canister and screw clockwise. Do not use an excessive force. Close the door.

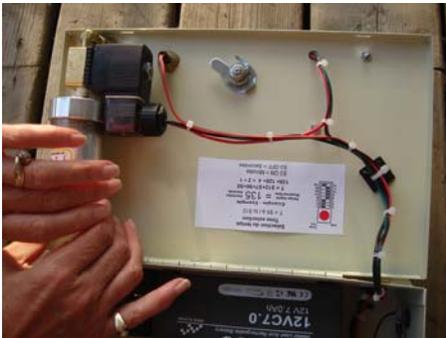

OUTING DELAY, PEPPER SPRAY DELAY, MOTION DETECTOR INSTRUCTIONS



The left circuit is for the pepper spray delay. The right circuit is for the outing time delay.

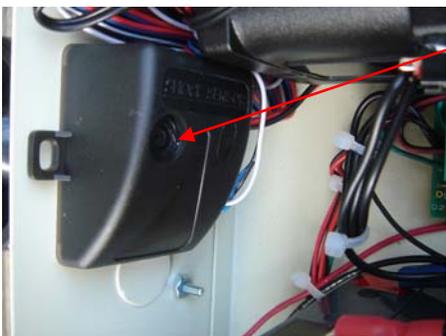

The shock sensor detector is adjustable with the small screw; when turned on the left, it is less sensitive and if turned on the right, it is more sensitive. Preferably, keep the manufactory settings as they are, otherwise the system can be easily activated and spread the Cayenne pepper.

FEATURE:

ARM/DISARM/PANIC MODE

Remote range distance: up to 75 feet's, battery (type 23A, 12v, alkaline) will require replacement but it is depending on the amount of use. The battery may last up to six months before it needs to be replaced.

WARNING WHEN ARMED: if you press and hold the arm button for 3 seconds, the panic mode will be on and activate immediately the Cayenne pepper and will spray. «Don't forget that the Cayenne pepper is very irritating».

Arm: wait 120 seconds after the system is on. From a maximum distance of 75 feet's, press and immediately release the remote's left button (with the lock), the alarm will «beep» and the red LED will start blinking.

Disarm: from a maximum distance of 75 feet's, press and release the same arm button, the alarm will «beep» twice and the red LED will still be on but without blinking.

Round key lock to open the panel

ON/OFF switch inside the panel

The battery 12 volt, 7 amp recharges automatically if the power supply, inside the panel, beside the battery, is connected to a 110 volt electric plug, otherwise, the battery has a 72 hours autonomy, if charged for a period of 12 hours. For a long term utilisation or recharged the battery, plug the power supply into a 110 volt electric plug and the other end of the power supply into the input located on the left side of the panel, under the alarm.

Operating temperature: - 20C up to + 45C

Motion detector range: about 10 to 35 feet's, depending on the height of the installation of the system. For example: 3 feet's height = about 10 feet distance, 7 feet's height = about 35 feet's distance.

Cayenne pepper concentration: 0.5%

Total quantity of Cayenne pepper: 50 grams

Total spray time: about 18 seconds for 50 grams

Coverage: 10,000 cubic feet, in few seconds, for 50 grams.

Automatically rearmed: one minute after it's alarm cycle.

Pepper spray adjustment: maximum of 3 alarms in a row, six seconds for each.

Outing time delay: 30 seconds (manufactory setting) but can be adjusted to more or less.

Shock sensor detector adjustable: we suggest keeping the manufactory settings, otherwise the system can be activated and spread the Cayenne pepper.